



# Entrance Mats PLASTIK 17 VELLUTO

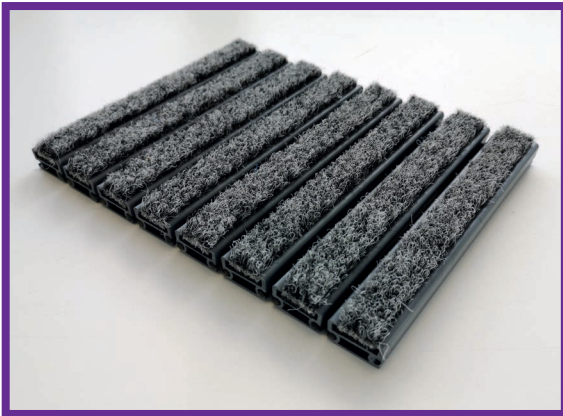

|   |                  |                          |                |
|---|------------------|--------------------------|----------------|
| <b>SUGGESTED LOCATION</b>   | <b>INDOOR</b> ✓  | <b>COVERED OUTDOOR</b> ✓ | <b>OUTDOOR</b> |
|   | <b>STRENGTHS</b> |                          | <b>R-12</b>    |
| <ul style="list-style-type: none"> <li>• Ideal plastic structure for anti-theft</li> <li>• Available wide range of textile flowers</li> </ul> |                  |                          |                |

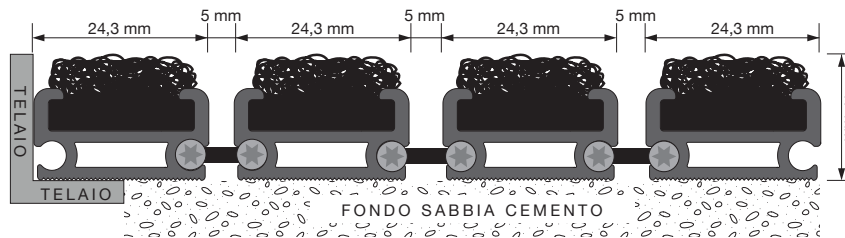

Profile color range:



Black



Lead gray


Structure in robust PVC shock-proof and scratch-proof tubular profiles joined by thermoplastic high-strength channels perforated or closed. Non-slip certification R-12 according to DIN 51130. Space between the slats 5mm. Lining of monofilament needle punched with velvety appearance. Thickness 17mm. c.a.

|                           |                                     |                      |   |
|---------------------------|-------------------------------------|----------------------|---|
| Overall thickness         | 17 mm                               | Profile's material   | Shockproof and scratch-proof PVC  |
| Weight                    | 8,5 kg/m <sup>2</sup>               | Profile's MAX lenght | 300 cm - 200 cm for outdoor   |
| Daily crossings           | between 1000 and 2000               | MAX lenght walkway   | 300 cm<br>(also evaluable extraordinary lenghts)  |
| Distance between profiles | Standard 5 mm                       | Covering             | Needle-punched VELLUTO (for fine dirt)<br>100% PP UV 1500 gr/m <sup>2</sup>   |
| Ligation                  | Draining standard (optional closed) | Certifications       | <ul style="list-style-type: none"> <li>• Certificate of quality ISO 9001-2015</li> <li>• R-12 according to DIN 51130</li> <li>• Certified coating Cfl-s1</li> </ul> |
| Profile's height          | 12 mm                               |                      |   |
| Middle section profile    | 1,5 mm                              |                      |   |


N.B. Mat.en's technical mats are a system of modular and rollable mats, trailerable and heelguard realized on shape and design on project. Are provided compensation profiles to reach the exact dimensions requested where necessary. Are counted 5mm air on measures communicated to allow the laying, the removal and the cleaning of the mats.

# Entrance Mats PLASTIK 17 VELLUTO

## Color range base mélange



## Special color range

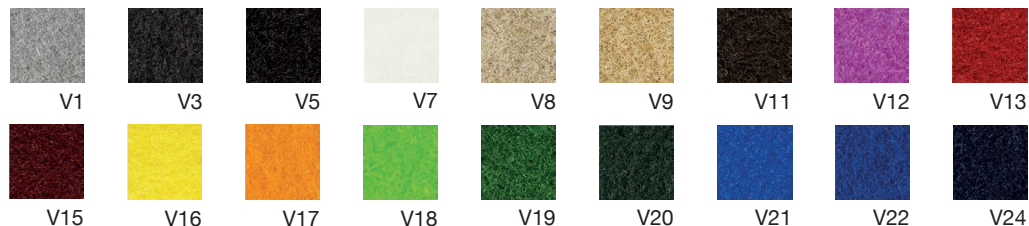

## ACCESSORIES

Containing frame in: aluminium, steel and brass

Anodized aluminium finishing-lists

Anodized aluminium antistumbling trailerable ramp

Stripes of needle punched for replacement

Special silicone for bonding stripes of needle punched

Connectors for entrance mats

Stainless steel containment tanks (optional draining)

Acoustic foam

## SERVICES

Survey with measures tracking

Installation

Shaping

Sanitation of the product

Maintenance, cleaning and repairs

Coating replacement

Technical consultancy

Graphic draft realization for customized mats

Sampling

## CUSTOMIZATIONS

BART (stainless steel bar with laser engraving logo)

Inlaid brand

RAL profiles painting

## CLEANING AND MAINTENANCE

To keep the carpets long-lived and working, we recommend to always check that the housing is levelled and in good condition and to ensure a thorough cleaning on a weekly basis.

- Aspire the top of the mat, roll it up and remove the dirt accumulated on the bottom with the help of a stiff bristle and vacuum cleaner (for draining channel).

- In case of stubborn dirt proceed after the ordinary cleaning with washing. Using a high pressure washer (at a minimum distance of 70cm), remove the accumulated dirt between the slats and on the coating. Allow the mat to dry completely, possibly vertically, before placing it back in its seat.

- To stain the textile coating, it's possible to clean the surface of the mat using warm water, laundry brush and the special soaking (can be purchased on [www.mat-en.com](http://www.mat-en.com)).

In case the coating strips were irreversibly damaged (chewing gum, oil and cigarette burns) or in case of extreme wear you can contact the company for partial or total replacement.

It's possible to sanitize the mat with the appropriate specific products purchasable on [www.mat-en.com](http://www.mat-en.com).

## CONSUMABLE

Mat.en offers a complete range of products designed for the maintenance, the cleaning and the sanitation of their products and the replacement of consumable accessories.

**MATEN**<sup>®</sup>  
[www.mat-en.com](http://www.mat-en.com)



Aderente ad AIB



Sistema di gestione qualità accreditato